




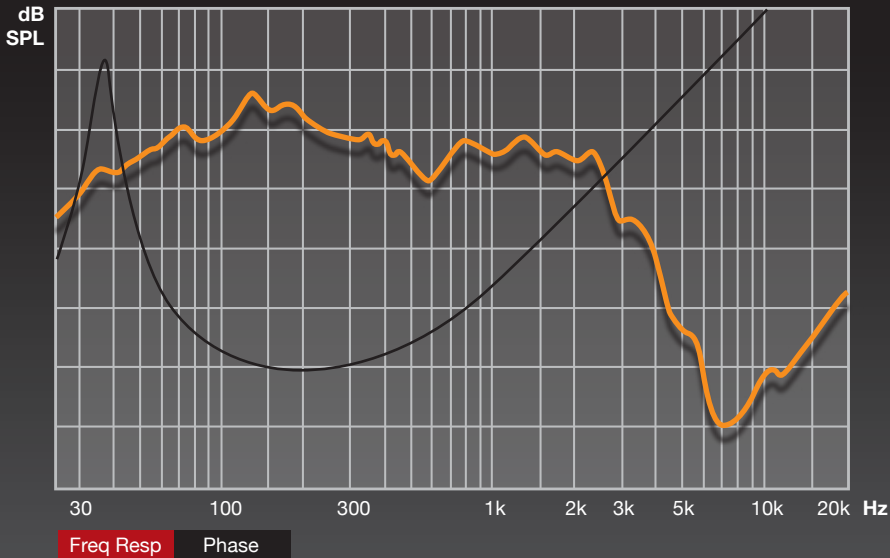

# CW126-D4

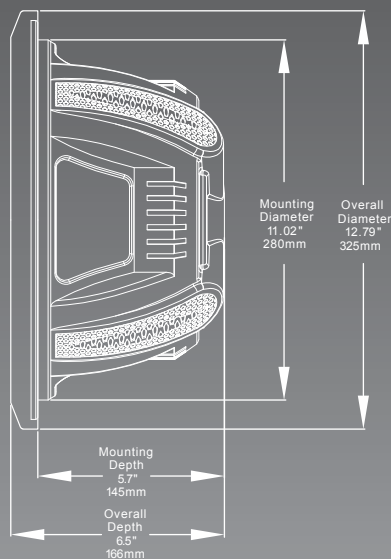

# 12"

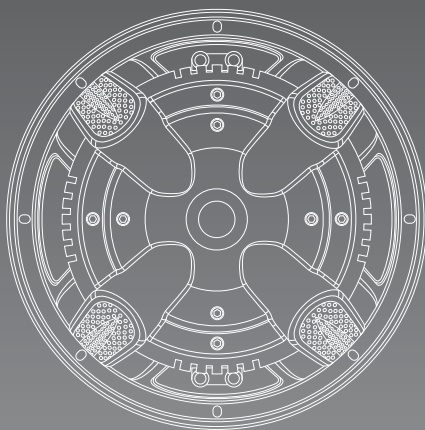

## TS PARAMETERS

**FO:** 30.090 Hz  
**QMS:** 6.882  
**QTS:** 0.589  
**LEVC:** 543.241 uH  
**CMS:** 211.451 uM/N  
**MMS:** 132.305 gr

**MMD:** 125.900 gr  
**NO:** .334 %  
**BL:** 8.244 T/M  
**SPL:** 96 dB  
**VAS:** 74.693 L  
**RE:** 3.2 Ohm  
**SD:** 498.760 cm


# 4 Ohm 2400 Watts

## SPECIFICATIONS

**Application:** Subwoofer

**Basket Type:** Steel  
**Cone:** Injection Molded High Gloss Polypropylene  
**Dust Cap:** Vacuum Molded Plastic  
**Surround Style:** Rubber Surround  
**Structure Weight:** 3.3lbs  
**2" KSV Voice Coil**

**Impedance:** Dual 4 ohm  
**RMS / Peak Watts:** 600 / 2400  
**Frequency Response:** 26Hz - 1.5KHz  
**SPL @ 1w/1m:** 96dB



**VENTED** (1.5cu ft)

**Enclosure Dim.**

**Slot Port**

**Circular Port**

**System Gain**

**F-3**

**Tuning Frequency**

**SIZE  
H x W x L**

16" x 16" x 14"  
(406.4 x 406.4 x 355.6)

1" x 14.5" x 10.3"  
(25.4 x 368.3 x 261.62)

4" (circle) x 11" deep  
(101.6 x 279.4)

+3.92 dB/60 Hz

37 Hz

40 Hz

**ENCLOSURE STYLE:**

**SEALED** (1.5cu ft)



**Enclosure Dim.**

**F-3**

**SIZE  
H x W x L**

16" x 16" x 14"  
(406.4 x 406.4 x 355.6)

44Hz



## Cadence Acoustics

6519 Highway 9 North • Howell, NJ 07731  
 800.477.2328 • 732.370.5400 • fax: 732.370.5553  
 cadence@cadencesound.com • www.cadencesound.com

