


CADENCE

CVL
EURO SERIES

CVL-84MBX

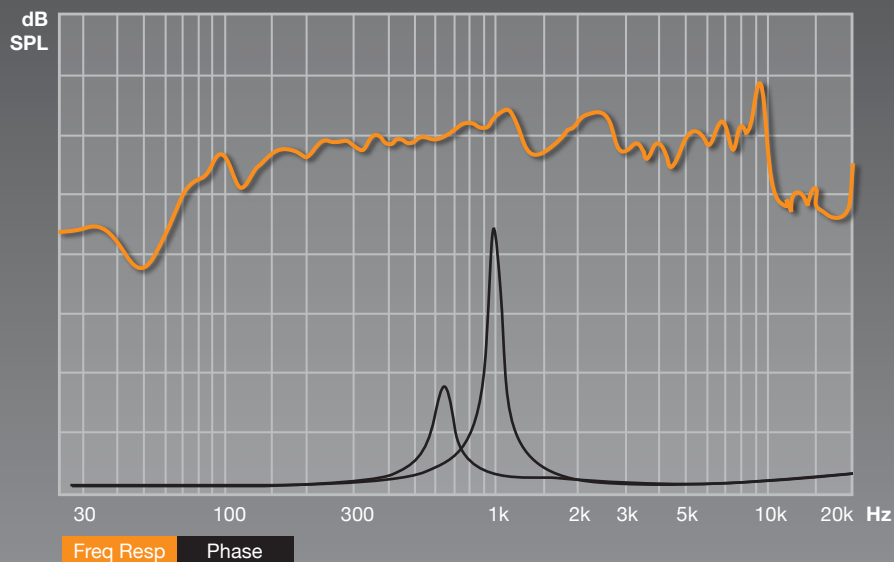

8 in



TS PARAMETERS

FMS: 100.6 Hz	BL: 8.1
QMS: 9.99	SPL: 102 dB
QES: 0.45	VAS: 10.5 l
QTS: 0.43	RE: 3.2 Ohm
RES: 21.6 Ohm	RP: 25.5 Ohm
RMS: 1.0 kg/s	LP: 9.8 mH
CMS: 0.16 mm/N	CP: 586.0 uF
MMS: 15.3 gr	LE: 0.3 mH
NREF: 2.29 %	

4 Ohm 500 Watts

SPECIFICATIONS

Application: Mid - Base

Basket Type: Cast Aluminum

Dust Cap: CNC Cast Aluminum Bullet

Surround Style: Accordion

Structure Weight: 90 oz.

2" High Power Voice Coil

Impedance: 4 Ohm

RMS / Peak Watts: 250 / 500

Frequency Response: 60Hz - 8KHz

SPL @ 1w/1m: 102dB

Cadence Acoustics

6519 Highway 9 North • Howell, NJ 07731
800.477.2328 • 732.370.5400 • fax: 732.370.5553 • www.cadencesound.com

