


CADENCE

CVL
EURO SERIES

CVL-64MBX

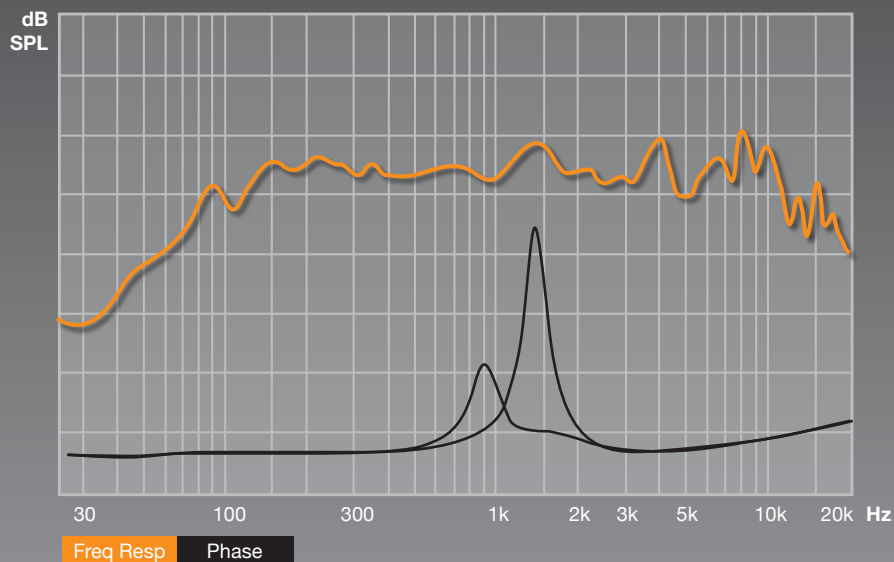

6.5 in

TS PARAMETERS

| | |
|-----------------------|---------------------|
| FMS: 147.9 Hz | BL: 6.1 |
| QMS: 5.81 | SPL: 99 dB |
| QES: 0.88 | VAS: 2.4 l |
| QTS: 0.76 | RE: 3.0 Ohm |
| RES: 12.5 Ohm | RP: 8.1 Ohm |
| RMS: 1.9 kg/s | LP: 3.0 mH |
| CMS: 0.10 mm/N | CP: 869.0 uF |
| MMS: 11.8 gr | LE: 0.3 mH |
| NREF: 0.86 % | |

4 Ohm 500 Watts

SPECIFICATIONS

Application: Mid - Base

Basket Type: Cast Aluminum

Dust Cap: CNC Cast Aluminum Bullet

Surround Style: Accordion

Structure Weight: 70 oz.

2" High Power Voice Coil

Impedance: 4 Ohm

RMS / Peak Watts: 250 / 500

Frequency Response: 90Hz - 9KHz

SPL @ 1w/1m: 99dB

Cadence Acoustics

6519 Highway 9 North • Howell, NJ 07731
800.477.2328 • 732.370.5400 • fax: 732.370.5553 • www.cadencesound.com

