




CW126-D2

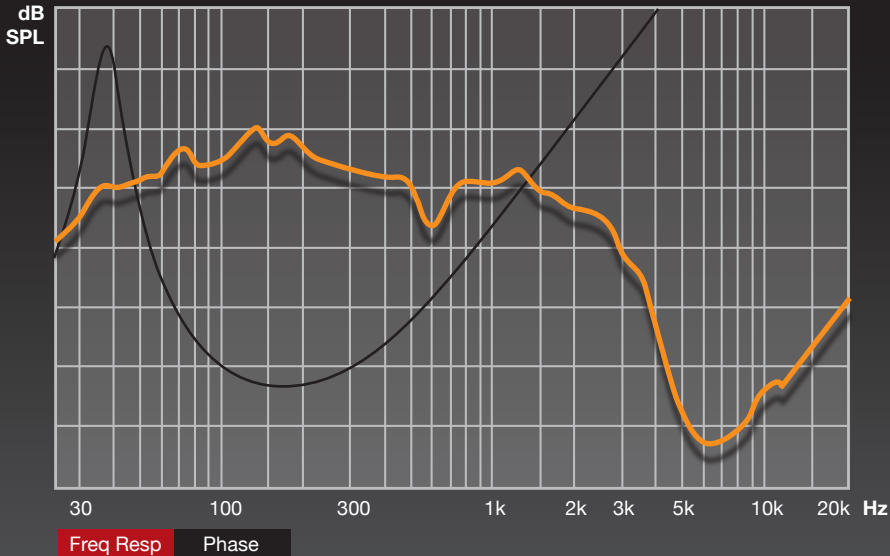

TS PARAMETERS

FO: 31.192 Hz **MMD:** 130.822 gr
QMS: 4.537 **NO:** .339 %
QES: 0.581 **BL:** 6.457 T/M
QTS: 0.515 **SPL:** 96 dB
LEVC: 450.539 uH **VAS:** 67.019 L
CMS: 189.725 uM/N **RE:** 1.6 Ohm
MMS: 137.227 gr **SD:** 498.760 cm

2 Ohm 2400 Watts






SPECIFICATIONS

Application: Subwoofer

Basket Type: Steel
Cone: Injection Molded High Gloss Polypropylene
Dust Cap: Vacuum Molded Plastic
Surround Style: Rubber Surround
Structure Weight: 3.3lbs
2" KSV Voice Coil

Impedance: 2 ohm
RMS / Peak Watts: 600 / 2400
Frequency Response: 26Hz - 1.5KHz
SPL @ 1w/1m: 96dB

12"

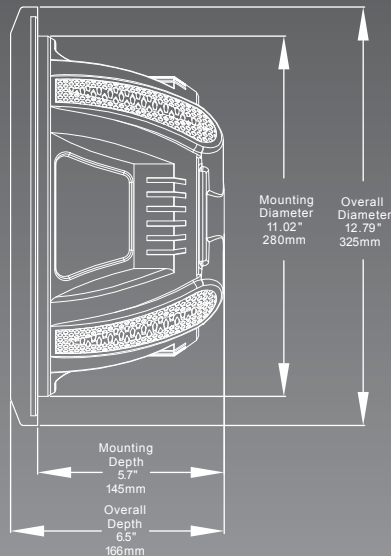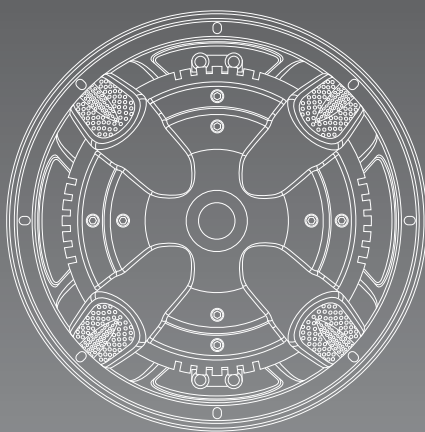

ENCLOSURE STYLE:

VENTED (1.5cu ft)

Enclosure Dim.	SIZE H x W x L (406.4 x 406.4 x 355.6)
Slot Port	1" x 14.5" x 10.3" (25.4 x 368.3 x 261.62)
Circular Port	4" (circle) x 11" deep (101.6 x 279.4)
System Gain	+3.92 dB/60 Hz
F-3	37 Hz
Tuning Frequency	40 Hz

ENCLOSURE STYLE:

SEALED (1.5cu ft)

Enclosure Dim.	SIZE H x W x L (406.4 x 406.4 x 355.6)
F-3	44Hz

Cadence Acoustics

6519 Highway 9 North • Howell, NJ 07731
 800.477.2328 • 732.370.5400 • fax: 732.370.5553
 cadence@cadencesound.com • www.cadencesound.com

